



COLOURFUL AND VERSATILE

Custom panel colours available POA



SHOT TIMER

To accurately and reliably time coffee extraction



LED LIGHTING OF THE WORKING AREA

Effective work station no matter the light conditions.



Zoe Vision




EASY SERVICE

Fast access to the internal parts for quick and easy technical service

LOW SERVICE COST

Designed to decrease the maintenance and inspection costs



Characteristics Zoe Vision



LED LIGHTING OF THE WORK AREA
Allows efficient working in any condition of environmental lighting.



SHOT TIMER
To accurately and reliably time coffee extraction.



AUTOSTEAM
Steam wand characterised by an electronic system that allows you to mount and/or heat milk at the set temperature.



ELECTRONIC AUTO-LEVEL
Through an electronic level probe the boiler is automatically filled and maintained to the right filling level.



EASY SERVICE
Fast access to the internal parts for quick and easy technical service.



ACTIVATED ELECTRONIC PRE-INFUSION
Management of the delayed activation of water solenoid in the first phase of brewing.



AUTOMATIC CLEANING CYCLE
Process for coffee group cleaning.



DOUBLE READING GAUGE
Allows you to control at the same time the boiler pressure and the distribution pressure.



CUP WARMER
Dedicated resistor to keep all the cups at the optimal temperature.




EXTERNAL VOLUMETRIC PUMP



NAKED PORTAFILTERS

Characteristics all models

Optional



COMPLETE RANGE


Available versions VISION, SED, SED "Tall" and "Compact"



VISION
Version with shot timer and barista lights




SED
Guarantees an electronic dosing system through the button panel




1 group SED/SAP

- 1 steam tap
- 1 water tap
- 1 one-cup portafilters
- 1 two-cup portafilters




2 group SED/SAP

- 2 steam taps
- 1 water tap
- 1 one-cup portafilters
- 2 two-cup portafilters




3 group SED/SAP

- 2 steam taps
- 1 water tap
- 1 one-cup portafilters
- 3 two-cup portafilters




compact SED/SAP

- 1 steam tap
- 1 water tap
- 1 one-cup portafilters
- 1 two-cup portafilters



2 group SED/SAP

- 2 steam taps
- 1 water tap
- 1 one-cup portafilters
- 2 two-cup portafilters

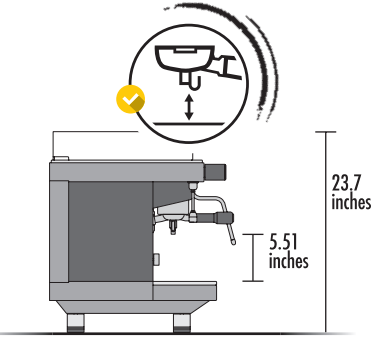

2-3 group SED/SAP


- 2 steam taps
- 1 water tap
- 1 one-cup portafilters
- 2 two-cup portafilters

Technical data		1 group	2 group	3 group	compact
voltage	V		220-240 1N / 380-415 3N		
power input	kW	2.7	3.3	6	2.3
steam boiler capacity	US gal / lt	1.85 / 7	2.64 / 10	3.7 / 14	1.19 / 4.5
steam boiler power	kW	2.5	2.95	5.6	2.15
pump power	kW	0.13	0.13	0.13	0.13
net weight	lb / kg	99 / 45	121 / 55	152 / 69	90 / 41



Zoe
Link to the website

Customisation of internal panels with graphics and colours (on request).

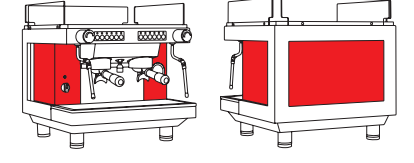

All images are subject to illustrative purpose. The manufacturer reserves the right to modify without prior notice the technical characteristics indicated above.